




ANTARES

GHID DE INSTALARE

INSTALLATION GUIDE

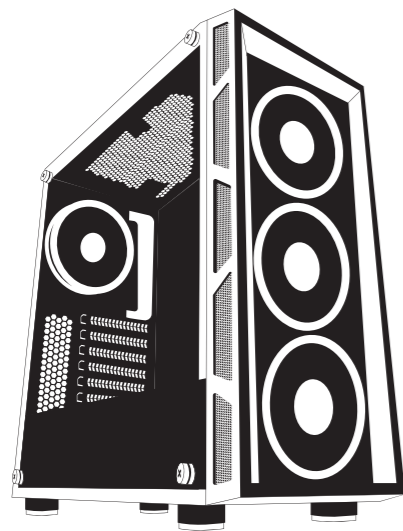

RO / EN

0

RO
 A: Scoateti panourile laterale si panoul frontal.
 B: Instalati sursa de alimentare.
 C: Instalati placa de baza.
 D: Instalati ventilatoarele.
 E: Instalati HDD-ul (hard-disk drive).
 F: Instalati SSD-ul (solid-state drive).
 G: Instalati placa grafica (VGA).

EN
 A: Remove the side panels and front panel.
 B: Install the power supply (PSU).
 C: Install the motherboard (MB).
 D: Install the fans.
 E: Install the hard-disk drive (HDD).
 F: Install the solid-state drive (SSD).
 G: Install the graphics card (VGA).

Accesorii incluse / Included accessories

A

RO
 • Prindeti doua suruburi in partea stanga a HDD-ului; gisati si fixati HDD-ul in locasul sau cu alte doua suruburi respectand imaginea de mai sus.

EN
 • Tighten two screws on the left side of the HDD; slide and secure the HDD in its place with two other screws following the image above.

C

• Alinai gaurile placii de baza cu distanterele din cupru si fixati folosind suruburile Nr.3. Daca unul din distantiere lipseste, adaugati un distantiere nou Nr.2.

• Align the MB holes with the copper spacers and secure using the No.3 screws. If one of the spacers is missing, add a new spacer (No.2).

B

RO
 • Va rugam sa va asigurati ca fantele de aerisire ale sursei si gaurile de prindere pentru suruburi sunt pozitionate corect fata de carcasa.

EN
 • Please make sure that the PSU ventilation slots and threaded holes are positioned correctly in relation to the chassis.

D

RO
 Ventilatoare acceptate (maxim)
 Frontal: 3x 120 mm
 Spate: 1x 120 mm
 Tavan: 2x 120 mm sau 2x 140 mm
 Pentru performante superioare carcasa permite folosirea unui sistem de racire cu lichid, oferind posibilitatea instalarii unui radiator de 120/240/360 mm (35 mm grosime maxima).

EN
 Supported fans (maximum)
 Front: 3x 120 mm
 Back: 1x 120 mm
 Top: 2x 120 mm or 2x 140 mm
 For superior performance, the chassis allows the use of a liquid cooling system, offering the possibility of installing a 120/240/360 mm radiator (35 mm maximum thickness).

E

RO
 • Prindeti doua suruburi in partea stanga a HDD-ului; gisati si fixati HDD-ul in locasul sau cu alte doua suruburi respectand imaginea de mai sus.

EN
 • Tighten two screws on the left side of the HDD; slide and secure the HDD in its place with two other screws following the image above.

F

RO
 • Instalati si fixati SSD-ul folosind patru suruburi ca in imaginea alaturata.

EN
 • Install and secure the SSD using four screws as shown in the picture.

G

RO
 • Scoateti capacul de protectie al sloturilor PCI. Instalati placa grafica si fixati-o cu surub.

EN
 • Remove the PCI slot protection cover. Install the graphics card and secure it with a screw.

Panou I/O
 I/O PANEL

Diagrama pinilor pentru cablul panoului I/O
 PIN diagram for I/O panel cable

CONECTOR USB 3.0 USB 3.0 CONNECTOR	CONECTOR USB 2.0 USB 2.0 CONNECTOR	CONECTOR HD AUDIO HD AUDIO CONNECTOR